



TIEMME


RACCORDERIA GENERICA GENERIC FITTINGS

Serie 1551

Raccordo dritto maschio/femmina
Straight fitting M/F connector

La raccorderia generica Tiemme si adatta ad ogni tipo di impianto idraulico domestico e commerciale, applicazioni industriali ed agricole, impianti di riscaldamento, igienico sanitari e generalmente con ogni fluido non corrosivo.

The brass generic fittings are suitable for domestic and commercial plumbing, industrial, agricultural application and generally with every non aggressive fluid.

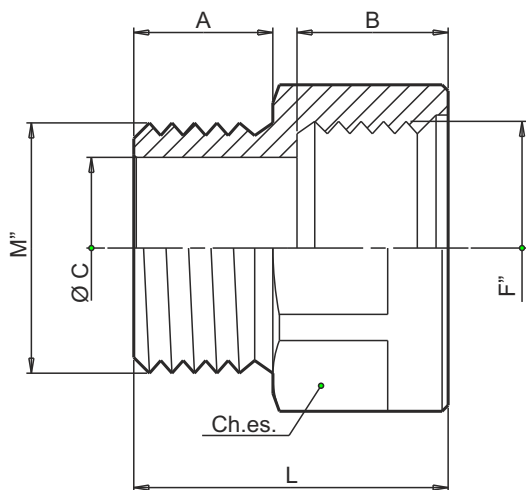

Caratteristiche Tecniche

Temperatura max di esercizio: 200°C
 Temperatura min di esercizio: -20°C
 Pressione max di esercizio: 30 bar
 Filettature: maschio UNI ISO 228
 femmina UNI ISO 228

Technical Features

Maximum temperature: 200°C
 Minimum temperature: -20°C
 Maximum operating pressure: 30 bar
 Threads: male UNI ISO 228
 female UNI ISO 228

Descrizione

Corpo

Materiale

Ottone CW617N - EN12165

Description


Body

Material

CW617N - EN12165 brass

Tabella dimensioni
Sizes table

M	F	CODICE / CODE	L	A	B	ØC	Ch.es.
1/4"	3/8"	1500861	22,0	9	10	8	21
1/4"	1/2"	1500862	24,5	9	12,5	8	27
3/8"	3/8"	1500529	23,0	10	10	12	21
3/8"	1/2"	1500106	24,5	10	12,5	12	24
3/8"	1"	1500581	28,5	10	12,5	12	ott. 37,5
1/2"	3/8"	1500305	22,5	11,5	10	15	22
1/2"	1/2"	1500259	26,0	11,5	12,5	15	24
1/2"	3/4"	1500043	26,5	11,5	13	15	31
1/2"	1"	1500158	30,0	11,5	15,5	15	37
3/4"	1/2"	1500140	26,0	13	12	19	27,5
3/4"	3/4"	1500185	26,5	11	13	21	31
3/4"	1"	1500053	30,5	12	15,5	20,5	37
1"	3/4"	1500165	30,0	15	13	25,5	37
1"	1"	1500272	30,5	12	15,5	25,5	37
1"	1"1/4	1500863	40,0	15	21	25,5	50
1"1/4	1"1/2	1500864	46,0	18	23	32	60

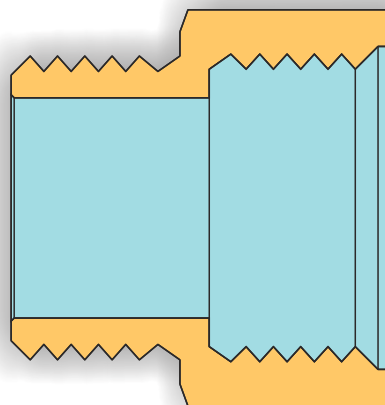

TIEMME Raccorderie S.p.A.
 Via Cavallera 6/A (Loc. Barco) - 25045 Castegnato (Bs) - Italy
 Tel +39 030 2142211 R.A. - Fax +39 030 2142206
 info@tiemme.com - www.tiemme.com

