



R-131 I/I Unions, Inside/Inside, Conical sealing

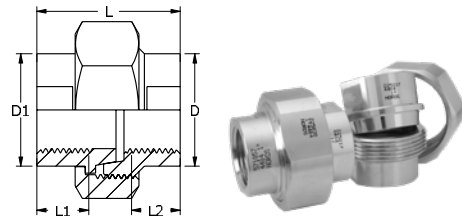

DN	Dim.	L mm	L1 ISO 228/1 mm	L2 ISO 228/1 mm	D, D1 mm	Width across flats mm	Design pressure Mpa	Weight kg/pce	Article code EN 1.4404
6	1/8"	32	12	6	15	24	10	0,06	11-1131-01
8	1/4"	38	12	9	20,5	30	10	0,11	11-1131-02
10	3/8"	41	14	10	24,5	38	10	0,18	11-1131-03
15	1/2"	46	17	13	29	42	10	0,24	11-1131-04
20	3/4"	50	20	16	35	50	10	0,35	11-1131-05
25	1"	56	23	18	44	60	10	0,56	11-1131-06
32	1 1/4"	62	25	20	52	67	6,4	0,69	11-1131-07
40	1 1/2"	64	26	21	58	72	6,4	0,86	11-1131-08
50	2"	67	28	21	71,5	85,5	6,4	1,21	11-1131-09
65	2 1/2"	70	29	23	88	110	4	1,84	11-1131-10
80	3"	75	31	25	102	124	4	2,62	11-1131-11

R-131 S/S Unions, Weld/Weld, Conical sealing

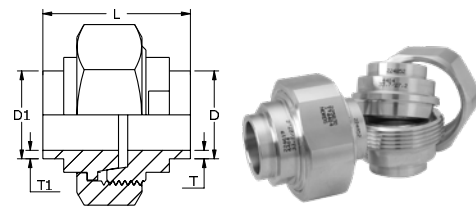

Dim.	L mm	T, T1 mm	D, D1 mm	Width across flats mm	Design pressure Mpa	Weight kg/pce	Article code EN 1.4404
14/10	38	2	14	24	10	0,06	11-7131-01
18/14	40	2	18	38	10	0,18	11-7131-02
21,3/16	40	2,7	21,3	38	10	0,18	11-7131-03
25/20	44	2,5	25	42	10	0,23	11-7131-04
26,9/23	44	2	26,9	42	10	0,27	11-7131-05
30/25	47	2,5	30	50	10	0,34	11-7131-06
33,7/27,2	53	3,3	33,7	60	10	0,59	11-7131-07
34/30	53	2	34	60	10	0,51	11-7131-08
38/34	57	2	38	60	6,4	0,48	11-7131-09
42,4/36	57	3,2	42,4	67	6,4	0,73	11-7131-10
44,5/40	57	2,3	44,5	67	6,4	0,65	11-7131-11
48,3/43	63	2,7	48,3	72	6,4	0,87	11-7131-12
51/47	63	2	51	72	6,4	0,86	11-7131-13
54/50	69	2	54	85,5	6,4	1,26	11-7131-14
60,3/55	74	2,7	60,3	85,5	6,4	1,21	11-7131-15
77/71	80	3	77	110	4	1,91	11-7131-16
89/81,7	83	3,7	89	124	4	2,85	11-7131-17